

SPREADERS

HOPPERS, TAILGATES,
WALK-BEHINDS, PRE-WET SYSTEMS



You put in the hours to finish what you start—and then do it all over again—to earn your place. You’ve dedicated your career to snow and ice management and control, and you deserve the utmost respect.

Founded on innovation in 1997, TrynEx International acknowledges those who put it all on the line by delivering the most dependable and low maintenance equipment available. Designed by people who understand your business from first hand experience, we support doers with durable, technologically advanced equipment, an industry-leading warranty, and unrivaled customer service.

For the diligent and determined, those with a dream and the grit to make it reality, it’s time to **make your mark.**

SNOWEX ✓





Consumer Installment Program Disclosures



Installment Promo Name: 14.49% for 36 Months, Consumer Only [15.91% APR*]

*Example: On financed amount of \$7,500, your down payment is \$0 with 36 monthly payments of \$263.33 each. Interest Rate is 13.99% [APR is 15.91%].

Note: The above financing programs are offered by Sheffield Financial, a division of Truist Bank. Member FDIC. Subject to credit approval. Approval, and any rates and terms provided, are based on credit worthiness. Other financing offers are available. See your local dealer for details. Rate advertised is based on minimum bureau risk score of 690. Minimum amount financed \$1,500; Maximum amount financed \$75,000. Other qualifications and restrictions may apply. Offer effective on eligible and qualified units purchased from a participating dealer. See dealer for product eligibility and qualifications between 5/1/2023 and 7/31/2023. The advertised promotion includes an Origination Fee which has been added to the Amount Financed in the amount of \$150.00. Offer subject to change without notice.

Installment Promo Name: 14.49% for 36 Months, Commerical Only [15.74% APR*]

*Example: On financed amount of \$7,500, your down payment is \$0 with no payment for 90 days, then 36 monthly payments of \$269.52 each. Interest Rate is 14.49% [APR is 15.74%].

Note: The above financing programs are offered by Sheffield Financial, a division of Truist Bank. Member FDIC. Subject to credit approval. Approval, and any rates and terms provided, are based on credit worthiness. Other financing offers are available. See your local dealer for details. Rate advertised is based on minimum bureau risk score of 690. Minimum amount financed \$1,500; Maximum amount financed \$75,000. Other qualifications and restrictions may apply. Offer effective on eligible and qualified units purchased from a participating dealer. See dealer for product eligibility and qualifications between 5/1/2023 and 7/31/2023. The advertised promotion includes an Origination Fee which has been added to the Amount Financed in the amount of \$150.00. Offer subject to change without notice.

HELIXX™ Poly Hopper

TRUCK BED
SPREADERS



FEATURES & SPECIFICATIONS

FULL LENGTH HELIXX™ AND MULTI-DIMENSIONAL TUB

The HELIXX runs the entire length of the hopper with variable flights. Combined with strategically positioned ribs/angles within the poly tub walls, this promotes the best possible material flow and even unloading.

CHUTE BAFFLE SYSTEM

Baffles within the chute direct material to key areas on the spinner resulting in a remarkably even and consistent spread pattern, as well as reducing material directed back at the vehicle.

CAB FORWARD DESIGN

The cab forward hopper delivers better payload distribution to reduce stress on the truck.

MATERIAL LEAK/SPILL PREVENTION

The HELIXX extends beyond the hopper and into the patented pre-wet mixing chamber to help prevent leaking/spilling during transport while providing an ideal location for pre-wetting material.

STAINLESS STEEL FRAME

Constructed of corrosion-resistant stainless steel, the frame features a unique leg and sill design to form a ridged backbone structure for greater durability.

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and HELIXX system speeds for precise material delivery, whether at low or high output. Features auto reverse and integrates with accessories (including pre-wet and direct liquid application).

HELIXX MATERIAL DELIVERY

The corkscrew design of the HELIXX material delivery system is optimized for efficient and cost-effective use of salt, and was designed to operate in the target range for salt spreading best practices. Its innovative design helps prevent clogs and provides a superior material flow to traditional augers.

ADDITIONAL FEATURES: Dump Switches, Flip-Up/Removable Chute, Fork Pockets, Fitted Tarp, No-Blast Startup, Top Screen, Vibrator and Work Light.

	\$8729	\$10,029	\$11,989	\$15,389
MODEL:	11780	11790	11800	11810
Capacity Volume	1.5 cu yd	2.25 cu yd	3.5 cu yd	5.0 cu yd
Capacity Weight	3,120 lb	4,680 lb	7,280 lb	10,400 lb
Empty Weight	412 lb	443 lb	694 lb	718 lb
Min. Bed Length	72"	80"	98"	98"



ACCESSORIES

<p>100 GALLON LIQUID TANK MODELS: 11780/11790</p>  <p>#74610 \$3679</p>	<p>200 GALLON LIQUID TANK MODELS: 11800/11810</p>  <p>#74620 \$4019</p>	<p>300 GALLON LIQUID TANK MODELS: 11800/11810</p>  <p>#74620 & #74630 \$5689</p>	<p>TRIPLE THREAT</p> <p>Spread, pre-wet or spray with one machine. By adding pre-wet tanks, a pump and a spray kit, the HELIXX™ spreader can both pre-wet materials and be used for spraying brine directly onto the driving surface for anti-icing applications.</p> 	
<p>SECONDARY WORK LIGHT ALL MODELS</p>  <p>#85457 \$129</p>	<p>STROBE LIGHT ALL MODELS</p> <p>#83745-1 \$303</p> 	<p>INVERTED V ALL MODELS</p> <p>#11961 \$234</p> <p>#11963 \$276</p> 	<p>CHUTE EXTENSION MODELS: 11780/11790</p> <p>#80221 \$158</p> 	<p style="writing-mode: vertical-rl; transform: rotate(180deg);">LIQUID SYSTEMS</p> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">INTEGRATED</p>

HELIXX™ Stainless Steel Hopper

**TRUCK BED
SPREADERS
(1.5-6.0 CU YD)**



STAINLESS STEEL CONSTRUCTION

Hopper and frame are constructed of corrosion-resistant stainless steel. The frame features a unique leg and sill design to form a ridged backbone structure for greater durability. Standard fork pockets simplify installation/removal.

CHUTE BAFFLE SYSTEM

Baffles within the chute direct material to key areas on the spinner resulting in a remarkably even and consistent spread pattern, as well as reducing material directed back at the vehicle.

CAB FORWARD DESIGN

The unique cab forward hopper design delivers better payload distribution to reduce stress on the truck. The HELIXX system extends beyond the hopper and into the patented pre-wet mixing chamber to help prevent leaking/spilling during transport while providing an ideal location for pre-wetting material.

FULL LENGTH HELIXX™ SYSTEM

The HELIXX system runs the entire length of the hopper with variable flights, promoting even unloading of material.

MATERIAL LEAK/SPILL PREVENTION

The HELIXX extends beyond the hopper and into the patented pre-wet mixing chamber to help prevent leaking/spilling during transport while providing an ideal location for pre-wetting material.

SPINNER HEIGHT ADJUSTMENT

Three spinner height adjustments allow the spreaders to achieve a consistent spinner height of 18 to 22 inches off the ground, regardless of the vehicle type. (Standard on 11920, 11930 and 11940 models)

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and HELIXX system speeds for precise material delivery, whether at low or high output. Features auto reverse and integrates with accessories (including pre-wet and direct liquid application).

ADDITIONAL FEATURES: Inverted V, Vibrator, Accessory Hub, Dump Switch, Flip-Up/Removable Chute, Top Screen







	\$7831	\$8457	\$10,272	\$12,402	\$13,779
MODEL:	11900	11910	11920	11930	11940
Capacity Volume	1.5 cu yd	2.0 cu yd	3.0 cu yd	4.5 cu yd	6.0 cu yd
Capacity Weight	3,120 lb	4,160 lb	6,240 lb	9,360 lb	12,480 lb
Empty Weight	490 lb	509 lb	632 lb	740 lb	818 lb
Min. Bed Length	62.5"	74.5"	91"	91"	102"



TRIPLE THREAT

Spread, pre-wet or spray with one machine. By adding pre-wet tanks, a pump and a spray kit, these HELIXX hopper spreaders can not only pre-wet materials, but they can also be used for spraying brine directly onto the driving surface for anti-icing applications. The components offer simple plug-and-play installation, meaning a contractor can upgrade to pre-wetting or direct liquid applications at any time.



<p>PRIMARY WORK LIGHT ALL MODELS</p> <p>#85456</p>  <p>\$163</p>	<p>STROBE LIGHT KIT ALL MODELS</p>  <p>#85458 \$295</p>	<p>SPILL GUARDS ALL MODELS</p>  <p>\$489 - 1379</p>	<p>CHUTE EXTENSION MODELS: 11900/11910</p> <p>#80221 \$158</p> 	<p>INTEGRATED ACCESSORIES</p> <p>Optional accessories such as lights, strobes and pre-wet systems easily plug into the control module and are operated with simple on/off buttons on the control.</p> <p>See Pages 28-30 for additional accessories.</p>
---	--	--	--	---

HELIXX™ Stainless Steel Hopper

TRUCK BED
SPREADER
(0.7 CU YD)



STAINLESS STEEL CONSTRUCTION

Hopper and frame are constructed of corrosion-resistant stainless steel. The frame features a unique leg and sill design to form a ridged backbone structure for greater durability, and riveted construction provides consistent, quality joints.

CHUTE BAFFLE SYSTEM

Baffles within the chute direct material to key areas on the spinner resulting in a remarkably even and consistent spread pattern, as well as reducing material directed back at the vehicle.

ACCESSORY INTEGRATION

Conveniently connect accessories directly into the hub mounted in the back of the hopper. Accessories automatically integrate with the hopper control without having to run additional wires from the front of the vehicle.

FULL LENGTH HELIXX™ SYSTEM

The HELIXX system runs the entire length of the hopper with variable flights, promoting even unloading of material.

FLIP-UP/REMOVABLE CHUTE

Remove a single pin to flip-up the chute, or two pins to take it off entirely, for easy hitch access and more flexible storage. Molded spinner plug must be removed when flipped for dumping.

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and HELIXX speeds for precise material delivery at both a low or high output. Features auto reverse and integrates with accessories (including pre-wet and direct liquid application on the 12140 model).

ADDITIONAL FEATURES: Dump Switch & Work Light, Top Screen, No-Blast Startup, Rear-Mounted Gear Box, Accessory Knock-Outs

\$7129

MODEL:	12140
Capacity Volume	0.7 cu yd
Capacity Weight	1,500 lb
Empty Weight	337 lb
Hopper Length	54.5"
Min. Bed Length	44"
Spread Width	30'



TRIPLE THREAT

Pre-Wet and Direct Liquid Application

The HELIXX™ spreader is a triple threat—with the ability to spread, pre-wet or spray. By adding pre-wet tanks, a pump and a spray kit, the spreaders not only can pre-wet materials, but they can also be used for spraying brine directly onto the driving surface for anti-icing applications.



VIBRATOR




LED WORK LIGHT KIT

#85458 **\$295**



INVERTED V

#85707
\$126



EXTENSION COLLAR

#85699
\$477



INTEGRATED ACCESSORIES

Optional accessories such as lights, strobes and pre-wet systems easily plug into the control module and are operated with simple on/off buttons on the control. See Pages 28-30 for additional accessories.

HELIXX™ 0.35 cu yd

UTV BED
SPREADER



HELIXX™ MATERIAL DELIVERY

The patent-pending corkscrew design of the HELIXX material delivery system is optimized for efficient and cost-effective use of salt, and was designed to operate in the target range for salt spreading best practices. Its innovative design helps prevent clogs and provides a superior material flow to traditional augers.

STAINLESS STEEL CONSTRUCTION

Hopper and frame are constructed of corrosion-resistant stainless steel. The frame features a unique leg and sill design to form a ridged backbone structure for greater durability, and riveted construction provides consistent, quality joints.

CHUTE Baffle SYSTEM

Baffles within the chute direct material to key areas on the spinner resulting in a remarkably even and consistent spread pattern, as well as reducing material directed back at the vehicle.

ACCESSORY INTEGRATION

Conveniently connect accessories directly into the hub mounted in the back of the hopper. Accessories automatically integrate with the hopper control without having to run additional wires from the front of the vehicle.

FULL LENGTH HELIXX DESIGN

The HELIXX system runs the entire length of the hopper with variable flights, promoting even unloading of material.

FLIP-UP/REMOVABLE CHUTE

Remove a single pin to flip-up the chute, or two pins to take it off entirely, for easy hitch access and more flexible storage. Molded spinner plug must be removed when flipped for dumping.

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and HELIXX speeds for precise material delivery at both a low or high output. Features auto reverse and integrates with accessories.

MODEL:	12145
Capacity (Volume)	0.35 cu yd
Capacity (Weight)	750 lb
Empty Weight	192 lb
Hopper Length	30"
Min. Bed Length Req.	28.5"
Spread Width	30'

\$4789



EXTENSION COLLARS
#85698
\$355

SPILL GUARDS
#85696
\$489

UTV SPREADER CONTROL SHIELD
#78585
\$28

RATCHET STRAP KIT
#68790
\$192

INVERTED V KIT
#85706
\$99

VIBRATOR KIT
#85459
\$4661

LED WORK LIGHT KIT
#85456
\$162

LED STROBE LIGHT KIT
#85458
\$295



See Pages 28-30 for full list of accessories.

V-Pro™



TRUCK BED SPREADERS



FEATURES & SPECIFICATIONS

INVERTED V / VIBRATOR

Patented system of a vibrator attached to a solid steel inverted "V" baffle provides a consistent flow of bulk materials to the auger.

EFFICIENT DIRECT DRIVE TRANSMISSION

Compact, independent weather-tight patented motor transmission. Quietly delivers power to the auger for controlled, positive feed of material.

REMOVABLE CHUTE ASSEMBLY

Gain easy access to truck hitch by removing the spinner assembly.

FITTED TARP

A tarp fitted to the spreader's dimensions protects material from outside weather elements.

TOP SCREEN

Ensures material that enters the hopper is of consistent size by breaking up any clumps and filtering out large debris.

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and auger speeds for precise material delivery, whether at low or high output.

ACCESSORIES

#OFK-020 **\$565**

OPTIMUM FLOW KIT

MODELS: 32200/32300/32600

Improves material flow and allows spreading of 50/50 salt/sand mix with vibrator and dual pitch baffle.



#83715



30 GAL **\$1464**

MODELS: 32300/32600

A 12-volt motor powers a direct-drive pump. This simple setup results in low maintenance and reliable performance.

LIQUID SYSTEMS

See Pages 28-30 for additional accessories.



MODEL:	32300	32600
Capacity Volume	0.5 cu yd	1.0 cu yd
Capacity Weight	1,080 lb	2,160 lb
Empty Weight	386 lb	416 lb
Bed Length	58"	58"

V-Pro™



UTV BED SPREADERS



FEATURES & SPECIFICATIONS

UTV READY

Specifically designed to accommodate the bed lengths and weight restrictions of most UTVs.

INVERTED V / VIBRATOR

Patented system of a vibrator attached to a solid steel inverted "V" baffle provides a consistent flow of bulk materials to the auger.

SPINNER GUARD

Positioned above and below the spinner to protect from contact.

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and auger speeds for precise material delivery, whether at low or high output.

REMOVABLE CHUTE ASSEMBLY

Gain easy access to UTV hitch by removing the spinner assembly.

HOLD DOWN KIT

Provides additional in-bed stability and security.

ADDITIONAL FEATURES: Auger Transmission, Top Screen, Spinner Guard, Fitted Tarp

ACCESSORIES

#TRK-3000



MATERIAL CONTROL TUBES

MODELS: 32200/32300/32600

Helps prevent leaking when handling fine pellet and flake materials.

\$360



#83715 30 GAL

MODELS: 32200

A 12-volt motor powers a direct-drive pump. This simple setup results in low maintenance and reliable performance.

\$1464

LIQUID SYSTEMS

See Pages 28-30 for additional accessories.



\$5789

MODEL: 32200

Capacity Volume 11 cu ft

Capacity Weight 880 lb

Empty Weight 280 lb



Drop Pro 600 & 1400

UTV AND TRACTOR SPREADERS



FEATURES & SPECIFICATIONS

ULTIMATE SIDEWALK SPREADERS

Designed to drop material exactly where it's needed, which is ideal for sidewalk applications. The SD-600-1 offers a spread width of 36 inches, whereas the larger SD-1400 model has a 48-inch spread width.

SEALED AUGER DRIVE TRANSMISSION

To help prevent corrosion and maximize service life, the drive system is sealed for protection against the elements.

VIBRATING BAFFLE

The vibrating baffle allows a consistent flow of materials to the material feed system.

VARIABLE-SPEED DIGITAL CONTROL

The enhanced digital control allows for precise material flow adjustment. Features a compact design, bright LED lights and integrated buttons for plug-and-play accessory control.

VARIABLE-SPEED DIGITAL CONTROL SD-1400

The digital control allows precise adjustment of the material feed rate, placing you in full control of the spreading results.

ADDITIONAL FEATURES: Top Screen, Fitted Lid, Standard 3-Point Mount (SD-1400)

OPTIONAL MOUNTS (SD-600-1): Utility Mount, Receiver Mount, 3-Point Mount



\$4229

\$5359

MODEL:	SD-600-1	SD-1400
Capacity (Volume)	6.0 cu ft	14.0 cu ft
Capacity (Weight)	480 lb	1,120 lb
Empty Weight	175 lb	375 lb

GATELESS MATERIAL DISTRIBUTION SYSTEM

A unique gateless material distribution system with an adjustable baffle and vibrator design maximizes spread consistency while preventing leaks when turned off.



ACCESSORIES

WORK LIGHT SD-600-1

\$142



#91820

STROBE LIGHT SD-600-1

\$246



#91815

See Pages 28-30 for full list of accessories.

Drop Pro™ 250 & 600

**UTV
SPREADERS**



FEATURES & SPECIFICATIONS

ENHANCED VARIABLE-SPEED DIGITAL CONTROL

Enhanced speed control allows you to precisely match material delivery rate to the conditions. Bright LED lights for better visibility and precise material flow adjustment. Self-diagnostic digital display allows for troubleshooting from the cab.

MATERIAL FEED SYSTEM

The Material Feed System saves time and material while minimizing turf damage, making it the ideal tool for maintaining sidewalks and other narrow areas. The precise material flow, up to 36" spreading width and unique drop ability allow you to place material exactly where it's needed, preventing bounce and scatter into landscape beds. It also has a gateless design to prevent material leaks between applications.

EASY-TO-ACTIVATE BAFFLES

A 36" spread width makes applications on sidewalks and walking paths easy. When you factor in a 6" salt leach after application, the SnowEx® drop spreaders can treat these surfaces with one or two passes and limit damage to the grass or sensitive surfaces right next to the path. The spread width can be limited to 30" by activating 3" baffles on either side of the trough.

FREE-FLOWING MATERIAL DELIVERY SYSTEM

The material delivery system uses proven paddle geometry and a new interference baffle to agitate the surrounding material with every revolution. This ensures a consistent amount of material flows into the spreader trough and, at the same time, keeps it from bridging.

ACCESSORIES

SIDE EXTENSIONS
#91805 **\$143**

#91810 **\$156**

VIBRATOR KIT

#91835 **\$385**

See Pages 28-30 for full list of accessories.



#87535
\$4214

#87635
\$4594


MODEL:	DPS-250	DPS-600
Capacity (Volume)	2.5 cu ft	6.0 cu ft
Capacity (Weight)	350 lb	650 lb
Empty Weight	130 lb	160 lb

Utility & Wireless Utility

TAILGATE SPREADERS



Retail Financing Available from
SHEFFIELD

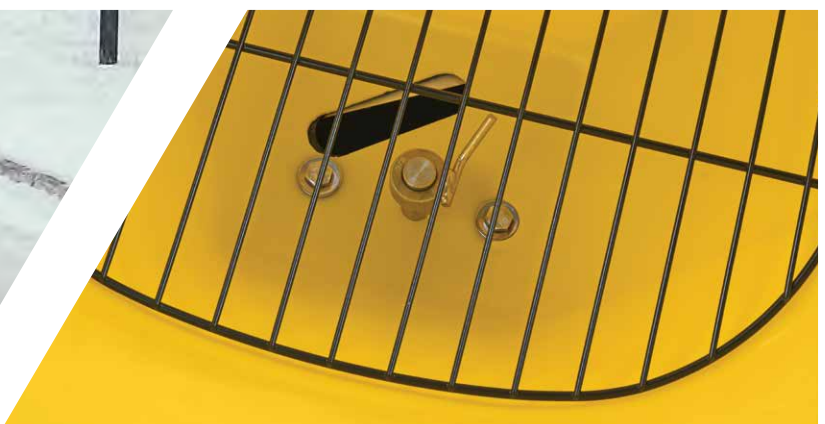

SIMPLE, PLUG-AND-PLAY OPERATION

Spreaders that can quickly connect to many different types of vehicles, with specific models catering to various bagged deicing materials.

CONSISTENT MATERIAL DELIVERY

The 3-inch vertical high-flow auger allows for efficient spreading of bagged rock salt and calcium flake.

SEALED DRIVE ENCLOSURE

Electric-powered spinner motor transmission is contained in a sealed, weather-resistant enclosure.

ELECTRIC GATE SP-100-1

Starts and stops material flow to the spinner for better material control and less waste.

VARIABLE-SPEED CONTROL

Weather-resistant, cab-mounted control allows for spinner speed adjustment. Standard on SP-100-1/SP-325. Optional on SP-125-1/SP-225-1.





ADDITIONAL FEATURES

Weather Cover (SP-100-1), Fitted Lid (SP-325), Standard Receiver Mount



	\$1939	\$1169	\$1169	\$1609	\$1079
MODEL:	SP-100-1	SP-125-1	SP-225-1	SP-325	SR-210
Capacity (Volume)	3.0 cu ft	3.0 cu ft	3.0 cu ft	3.25 cu ft	3.0 cu ft
Capacity (Weight)	240 lb	240 lb	240 lb	260 lb	240 lb
Empty Weight	75 lb	65 lb	68 lb	79 lb	68 lb

ALL UTILITY & WIRELESS UTILITY SPREADERS

<p>UTILITY MOUNT #UTM-175 Installs spreaders to the back of utility vehicles.  \$341</p>	<p>3-POINT MOUNT #TPM-175-1 Adds spreaders to the 3-point hitch of utility tractors.  \$341</p>	<p>DROP UTILITY MOUNT Provides a lower-profile mount for utility vehicles. #DRM-175-1 \$512 </p>	<p>SP-125-1/SP-225-1/SR-210 PIVOT PAL #PPT-175-1 Allows tailgate spreaders to swing away from tailgate. \$382 </p>
---	--	---	--

<p>SP-125-1 20' MANUAL GATE CABLE KIT \$100  #D6306</p>	<p>SP-125-1/SP-225-1 WEATHER-RESISTANT CONTROL \$327  #VAR-020</p>	<p>SR-210 WIRELESS SPREADER HARNESS \$157  #D6068</p>	<p>SP-125-1/SP-225-1/SR-210 WEATHER COVER \$79  #WSC-020</p>	<p>WIRELESS CONTROL SR-210 A pocket-sized, wireless key fob offers two spinner speed settings for easy operation.  Comes Standard on SR-210</p>
--	---	--	--	--

See Pages 28-30 for full list of accessories.

Tailgate Pro

FLEETFLEX
ELECTRICAL SYSTEM

**TAILGATE
SPREADERS**



FEATURES & SPECIFICATIONS

VERTICAL HIGH-FLOW AUGER

The 3-inch high-flow auger allows the units to spread bagged rock salt and calcium flake consistently.

PATENTED SEALED DRIVE ENCLOSURE

Protects 12-volt electric drive/transmission from the elements for longer spreader life.

FITTED LID

The fitted lid provides a convenient solution to protect material from moisture.

STANDARD RECEIVER MOUNT

SP-575X-1

Model SP-575X-1 comes standard with a 2-inch (51 mm) receiver mount, making it ideal for use on a variety of vehicles. Model SP-1075X-1 offers plenty of versatility with optional receiver, pivot and 3-point mounting systems available.

VARIABLE-SPEED DIGITAL CONTROL

The compact digital control offers variable-speed control of the spinner. It features a diagnostic display, bright LED lights and convenient accessory buttons for easy control of optional accessories.

ADDITIONAL FEATURES: Single-Stage Design (1 auger)

OPTIONAL MOUNTS

SP-575X-1

PIVOT PAL

Allows tailgate spreaders to swing away from tailgate.

\$382



#PPT-175-1

SP-1075X-1

UNIVERSAL PIVOT MOUNT

Allows tailgate spreaders to swing away from tailgate. Height, width, bumper style and tailgate offset are adjustable to different trucks.



ACCESSORIES

WORK LIGHT

\$110



#52424

ADJUSTABLE DEFLECTOR

\$199



#ADF-020

See Pages 28-30 for full list of accessories.



MODEL:	SP-575X-1	SP-1075X-1
Capacity Volume	5.75 cu ft	10.75 cu ft
Capacity Weight	460 lb	860 lb
Empty Weight	106 lb	141 lb

Bulk Pro™



FLEETFLEX
ELECTRICAL SYSTEM

**TAILGATE
SPREADERS**



FEATURES & SPECIFICATIONS

MOUNTING SYSTEMS

Model SP-1575-1 comes with an integrated 2" receiver/3-point mounting system for use with many types of vehicles. SP-1875-1 offers plenty of versatility with a variety of mount options available, including a Universal Pivot Mount.

VIBRATOR

The vibrator attaches to the inverted V baffle to maximize flow of bulk materials.

INVERTED "V"

The patented inverted V baffle allows a consistent flow of bulk materials to the auger.

DUAL VARIABLE-SPEED CONTROL

This digital, self-diagnosing unit allows independent adjustment of spinner and auger speeds.

FITTED LID

The fitted lid provides a convenient solution to protect material from moisture.

TRANSVERSE AUGER TRANSMISSION

Features a 12-volt electric motor for reliable operation and low maintenance. The auger uses heavy-duty, variable-pitch flighting, which provides balanced delivery of material to the spinner. This innovative system allows the tailgate spreaders to distribute bulk material with unmatched accuracy.

ADDITIONAL FEATURES: Two-Stage Design (auger/spinner), Top Screen, Low Profile Design, Fitted Wind-Resistant Lid

OPTIONAL MOUNTS

SP-1075X-1/SP-1875-1

RECEIVER MOUNT

Installs spreaders on a 2-inch receiver hitch. SP-1875-1 also requires adapter (RHT-085) for use with receiver mount.



SP-1875-1

3-POINT MOUNT

Adds spreaders to the 3-point hitch of utility tractors.



ACCESSORIES

MATERIAL CONTROL TUBES

Prevent leaking issues when handling fine pellet and flake materials.



#TRK-1575-1
\$329

#TRK-1875
\$330

See Pages 28-30 for full list of accessories.

PRE-WET SYSTEMS AVAILABLE

83715 (30 GAL)
SP-1875-1

\$4032

A 12-volt motor powers a direct-drive pump. This simple setup results in low maintenance and reliable performance.



\$3762

\$4032

MODEL:	SP-1575-1	SP-1875-1
Capacity Volume	5.25 cu ft	9.0 cu ft
Capacity Weight	420 lb	720 lb
Empty Weight	160 lb	180 lb

Precision Pro

**TAILGATE
SPREADER**

FEATURES & SPECIFICATIONS



MODEL:	SP-1675	
Capacity Volume	6.0 cu ft	\$4569
Capacity Weight	480 lb	Requires mount.
Empty Weight	290 lb	

VARIABLE-WIDTH SIDEWALK SPREADER

Broadcast-type spreader designed to adjust to varying widths of sidewalks or paths. Offers a variable spread pattern from 4 to 12 feet wide.

LEAK-FREE MATERIAL DISTRIBUTION

The gateless design doesn't leak material when the spreader is turned off.

CONSISTENT MATERIAL FLOW

Utilizes volumetric feeding system to deliver material directly to the center of the spinner consistently, regardless of material type or condition.

ADJUSTABLE SPINNER

Constructed of stainless steel for superior corrosion resistance, the spinner includes adjustable cups to refine the spread pattern in order to most efficiently cater to the application.

DUAL VARIABLE-SPEED CONTROL

Allows for variable control of spinner and auger speeds for precise material delivery, whether at low or high output.

FEATURES & SPECIFICATIONS



\$13,989

SP-7000
1.5 cu yd
3,240 lb
985 lb

Tow ProTM TOW-BEHIND SPREADERS

EFFICIENT DIRECT DRIVE TRANSMISSION

The compact, weather-resistant transmission delivers efficient flow to the spinner. Heavy-duty solid steel construction provides maximum torque. (SP-7000)

SIDEWALK DEFLECTOR

Adjusts the spread width for sidewalk applications, narrowing the target area only. (SP-7000)

SHUTOFF GATE

Electric shutoff gate ensures spreader throat is closed to avoid spills during transport. (SP-7000)

ADJUSTABLE SPINNER

Allows for fine tuning of the spread pattern. Constructed of stainless steel for corrosion resistance.

INDEPENDENT SPINNER/AUGER CONTROL

Allows independent speed control of spinner and material feed system. Includes digital readout and blast button. (SP-7000)

V-Maxx™

**DUMP BOX
TAILGATE
SPREADER**



FEATURES & SPECIFICATIONS

REPLACEABLE TAILGATE DESIGN

Replaces the dump body tailgate to take better advantage of the large capacity of a dump box by turning it into a high-volume spreader during winter months.

EFFICIENT DIRECT DRIVE TRANSMISSION

A compact, weather-resistant direct drive transmission delivers efficient flow to the spinner by reducing potential binding and bridging of materials. The unit's heavy-duty solid steel construction provides maximum torque.

VIBRATOR

Reduces material clumping for continuous material flow.

WORK LIGHT

Standard work light provides better visibility of the spinner area during dark or snowy conditions.

STANDARD UNIVERSAL MOUNTING KIT

Allows spreader to easily attach to a wide variety of dump bodies. Since this electric powered spreader doesn't require hoses, pumps or other hydraulic components, dump boxes can be converted for spreading quickly.

DUAL-VARIABLE SPEED CONTROL

Allows for variable control of spinner and auger speeds for precise material delivery, whether at low or high output.

\$7585

MODEL:	SP-2400
Spreading Width	Up to 40'
Hopper Width	84"
Empty Weight	326 lb

Broadcast & Drop

**WALK-BEHIND
SPREADERS**



FEATURES & SPECIFICATIONS

SINGLE-SLOT PORT DESIGN

SP-65/SP-85/SP-85SS

Enhances material flow from the hopper.

ADJUSTABLE SIDEWALK DEFLECTORS

SP-85/SP-85SS

Limit spread pattern to better accommodate sidewalks and paths.

PRECISE MATERIAL DELIVERY

SD-95/SD-95SS

Drop spreader design applies materials directly below hopper, making it ideal for confined spaces or precision applications.

STAINLESS STEEL FRAME

SP-85SS/SD-95SS

Helps eliminate corrosion concerns.

ADDITIONAL FEATURES: Poly Cover, Top Screen, Oversize Tires (SP-85/SP-85SS and SD-95/SD-95SS)



MODEL:	SP-65	SP-85/ SP-85SS	SD-95/ SD-95SS
Spreading Width	Up to 20'	Up to 20'	28"
Capacity Weight	100 lb	160 lb	160 lb
Empty Weight	25 lb	42 lb	55 lb
SP 65	490.28		SD 95 1134.03
SP 85	816.79		SD 95SS 1314.28
SP 85SS	964.08		

Storage Containers

ALL-WEATHER STORAGE



FEATURES & SPECIFICATIONS

VERSATILE ALL-WEATHER APPLICATIONS

These poly containers are great for de-icing material because of their non-corrosive nature but can also be used for a variety of other storage applications like storing PPE and oil dry for shops and maintenance centers, or bulk item storage for manufacturing facilities.

MOLDED-IN HANDLE

The lid of the container has a molded-in handle for easy lifting when wearing big winter gloves.

FORK POCKETS

The 6, 12, and 18 cu ft models come standard with molded-in fork pockets to allow for easy placement, empty or full. This protects your team from injuries due to incorrect lifting practices.

LOCKABLE LIDS

Each storage container has a molded-in closure that can be secured with an extended shank padlock to protect the contents inside.



\$239 \$376 \$567 \$651

MODEL:	74045	74047	74049	74051
Capacity	3 cu ft	6 cu ft	12 cu ft	18 cu ft
Empty Weight	19 lb	35.5 lb	50.5 lb	58 lb

ACCESSORIES



POLY SCOOP
The poly scoop is the perfect way to transfer material out of the storage containers—especially when used for storing de-icing materials, salt, or sand.

\$24

See Pages 28-30 for additional accessories.

TrynEx International offers a limited warranty of one year on storage containers.

MATERIALS & VEHICLE COMPATIBILITY

	Walk-Behinds			Utility & Wireless					Drop Pro™				Tailgate Pro		Bulk Pro™	
	SP-65	SP-85 / SP-85 SS	SD-95 / SD-95 SS	SP-100-1	SP-125-1	SP-225-1	SP-325	SR-210	DPS-250	DPS-600	SD-600-1	SD-1400	SP-575X-1	SP-1075X-1	SP-1575-1	SP-1875-1
GRANULAR DE-ICING MATERIALS																
Bagged Ice Melters	X	X	X	X	X				X	X	X	X	X ²	X ²	X ⁵	X ⁵
Bagged Rock Salt	X	X	X			X	X	X	X	X	X	X	X	X	X	X
Bulk Salt									X	X	X	X	X ³	X ³	X	X
Calcium Flakes				X	X				X	X	X	X	X	X	X ⁵	X ⁵
Calcium Chloride Pellets	X	X	X	X	X				X	X	X	X	X ²	X ²	X ⁵	X ⁵
50/50 Salt/Sand Mix*									X	X	X	X			X	X
Dry Free-Flowing Sand*									X	X	X	X			X	X
LIQUID DE-ICING MATERIALS																
Salt Brine**																X
Calcium Chloride Solution**																X
Premium Solutions**																X
<p>Selecting the proper de-icing materials can vary by operator preference, experience and environmental considerations. Consult your local SnowEx dealer with questions regarding material selection and availability.</p>																
VEHICLE COMPATIBILITY																
UTV				X ⁶	X ⁶	X ⁶	X ⁶	X ⁶	X	X	X		X ⁶	X ⁶	X ⁶	X ⁶
Compact Pickup Truck/SUV				X	X	X	X	X				X	X	X	X	
1/2-Ton Pickup Truck				X	X	X	X	X					X	X	X	X ⁶
3/4-Ton & 1-Ton Pickup Truck				X	X	X	X	X					X	X	X ⁶	X
Flatbed				X	X	X	X	X					X	X	X	X
1-Ton Dump Bed [^]																
Tractor				X ⁶	X ⁶	X ⁶	X ⁶	X ⁶	X	X	X	X	X ⁶	X ⁶	X ⁶	X ⁶

* Optional inverted-V and additional vibrator are recommended for materials that are susceptible to compacting.

** Only with pre-wet or liquid systems.

[^] No low profile. Distance of overhang from hinge pins cannot exceed 18 inches.

Tow-Behind		Precision Pro	V-Maxx™	V-Pro™			HELIXX™ Poly Hopper				HELIXX Stainless Steel Hopper						
SP-1225G	SP-7000	SP-1675	SP-2400	32200	32300	32600	11780	11790	11800	11810	12145	12140	11900	11910	11920	11930	11940
X ⁵	X	X		X ⁵	X ⁵	X ⁵	X	X	X	X	X	X	X	X	X	X	X
X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X
X	X	X		X ⁵	X ⁵	X ⁵	X	X	X	X	X	X	X	X	X	X	X
X	X	X	X	X ¹	X ¹	X ¹	X	X	X	X	X	X	X	X	X	X	X
X	X		X	X ¹	X ¹	X ¹	X	X	X	X	X	X	X	X	X	X	X
				X	X	X	X	X	X	X		X	X	X	X	X	X
				X	X	X	X	X	X	X		X	X	X	X	X	X
				X	X	X	X	X	X	X		X	X	X	X	X	X
X ⁷	X ⁷	X ⁶		X	X ⁶						X						
X ⁷	X ⁷	X ⁶									X ⁶						
X ⁷	X ⁷	X ⁶			X	X						X					
X ⁷	X	X ⁶			X	X	X	X				X	X	X			
	X	X	X		X	X	X	X	X	X			X	X	X	X	X
			X			X	X	X	X	X			X	X	X	X	X
X ⁷	X ⁷	X ⁶															

1) Requires OFK-020 Optimum Flow Kit.
2) Requires GAK-020 Gate Assembly Kit.
3) Requires 95059 Vibrator Kit with Harness.

4) Requires FFK-020 Free Flow Kit.
5) Requires TRK Material Control Tube.
6) Requires an optional mount and/or accessories.

7) Off-road use only.
8) Minimum 1,200 lb capacity.

MOUNTS & HITCHES

DROP UTILITY MOUNT

Provides a lower-profile mount for utility vehicles.



#DRM-175-1
\$512

LIGHT-DUTY HITCH MOUNT

Provides a lower-profile mount for utility vehicles.



#LDM-175
\$188

UNIVERSAL PIVOT MOUNT

Allows tailgate spreaders to swing away from tailgate. Height, width, bumper style and tailgate offset are adjustable to different trucks.



#PMT-175-1 **\$674**

PIVOT PAL


Allows tailgate spreaders to swing away from tailgate.



#PPT-175-1
\$382

ADAPTER


This adapter works with the RHT-380 to install spreader model SP-1875-1 on a 2-inch receiver hitch.



#RHT-085
\$248

SKID-STEER MOUNT

Attaches spreader to the mounting plate on a skid-steer.



#SSH-175-1 **\$658**

COMPATIBILITY MATRIX

	Utility & Wireless					Drop Pro™				Tailgate Pro		Bulk Pro™		Precision Pro	V-Maxx™
	SP-100-1	SP-125-1	SP-225-1	SP-325	SR-210	DPS-250	DPS-600	SD-600-1	SD-1400	SP-575X-1	SP-1075X-1	SP-1575-1	SP-1875-1	SP-1675	SP-2400
Drop Utility Mount	X	X	X	X	X					X					
Universal Pivot Mount											X		X		
Pivot Pal	X	X	X	X						X					
3-Point Mount	X	X	X	X	X	std	std	X	std	X	X		X	X	
Receiver Mount						std	std	X			X		X	X	
Adapter													X		
Skid-Steer Mount										X					
Trailer Mount	X	X	X	X	X					X					
In-Bed Mount	X	X	X	X	X	std	std	X		X				X*	

* Requires minimum bed length of 35 inches and minimum bed width of 47 inches. Some mounts may be standard on select models.

std = Included standard with spreader
x = Sold separately

Three Point Hitch Mount
Fits SR-210, SP-100, SP-125,
SP-225, SP-325 & SP-575X

#TPM-175-1
\$341



Utility Mount

Fits SR-210, SP-100, SP-125,
SP-225, SP-325 & SP-575X



#UTM-175
\$341

2" Receiver Hitch Mount
For SP-1075X & SP-1875













#RHT-380
\$669

Tailgate & Drop Spreader Mounts










LDM 175	2" Light Duty Receiver Hitch Mount	189.00
TPD 020 1	Three Point Mount for SD-600 & SP-1675	282.00
RHT 380	2" Receiver Hitch Mount for SP-1075X & SP-1875	669.00
RHT 085	Adapter for the RHT-380 to mount the SP-1875	248.00
DRM 175 1	Drop Utility Mount- Fits SP-125, SP-225, SP-325 & SP-575	512.00
PPT 175 1	Pivot Pal Mount Kit - Fits SP-125, SP-225, SP-325 & SP-575	382.00
SSH 175 1	Skid Steer Mount for SP-575X	658.00
PMT 175 1	Pivot Mount - Fits SP-1075/1875 (Not for 2017+ Ford)	674.00
31350 1	Pivot Mount - Fits SP-1075/1875 (2017+ Ford ONLY)	653.00
TPM 175 1	Three Point Hitch Mount - Fits SR-210, SP-100, SP-125, SP-225, SP-325 & SP-575X	341.00
TPM 275	Three Point Hitch Mount for SP-1075X & SP-1875	585.00
UTM 175	Utility Mount - Fits SR-210, SP-100, SP-125, SP-225, SP-325 & SP-575X	341.00
TPR 020 1	2" Receiver Mount for SD-600 & SP-1675	368.00
UBM 175 1	Utility Vehicle Bed Mount for SD-600 & SP-1675	367.00

ACCESSORIES

WORK LIGHTS	STROBE LIGHT	VIBRATOR KIT	SECOND VIBRATOR KIT	VIBRATOR KIT - FLEET FLEX
<p>Offer better visibility at rear of spreader during night applications. Available for use with all FLEET FLEX system spreaders.</p> 	<p>Alerts traffic to spreader's presence, especially during night operations.</p> 	<p>A more powerful vibrator for improved material flow. Ideal for non free-flowing material, such as salt/sand mix, bulk salt or moist material (wiring harness included).</p> 	<p>Provides an additional vibrator for improved material flow. Ideal for non free-flowing material, such as salt/sand mix, bulk salt or moist material (wiring harness included).</p> 	<p>Designed for FLEET FLEX system-enabled Tailgate Pro spreaders to assist with material flow. Ideal for non free-flowing material (wiring harness included).</p> 
20' MANUAL GATE CABLE KIT	WEATHER-RESISTANT CONTROL	WEATHER COVER	ADJUSTABLE DEFLECTOR	POLY DEFLECTOR KIT
<p>Provides an extended 20' cable for manual gates.</p> 	<p>Controls the spinner from a single weather-resistant control located in the vehicle cab.</p> 	<p>Helps prevent moisture contamination in spreader material.</p> 	<p>Restricts spread pattern to help prevent material waste and vehicle damage from flying debris.</p> 	<p>Allows for the spreading of material in narrow areas, such as sidewalks.</p> 

ACCESSORY MATRIX-TAILGATE SPREADERS

	Utility & Wireless					PRO SERIES™ Spreaders		BULK PRO™ Spreaders		DROP PRO™ Spreaders		Stainless DROP PRO™ Spreaders	
	SP-100-1	SP-125-1	SP-225-1	SP-325	SR-210	SP-575X-1	SP-1075X-1	SP-1575-1	SP-1875-1	SD-600-1	SD-1400	DPS-250	DPS-600
Work Light Kit						X	X	X	X	X		X	X
Strobe Kit										X		X	X
Vibrator Kit						X	X	X	X			X	X
Adjustable Deflector						X	X						
Gate Assembly Kit						X	X						
Auger Tube Restrictor Kit								X	X				
Variable Speed Controller		X	X										
Weather Cover		X	X		X								
Manual Gate Cable Kit		X											

<p>OPTIMUM FLOW KIT</p> <p>Improves material flow and allows spreading of 50/50 salt/sand mix with vibrator and dual pitch baffle.</p> 	<p>FREE FLOW KIT</p> <p>Allows adjustment of material flow to the auger to compensate for amount of moisture in the specific material and granular size (from coarse to fine).</p> 	<p>MATERIAL CONTROL TUBES</p> <p>Helps prevent leaking when handling fine pellet and flake materials.</p> 	<p>GATE ASSEMBLY KIT</p> <p>Converts spreaders to use granular and pelletized material. Includes adjustable stainless-steel gate that regulates flow rate (10-foot cable included).</p> 	<p>WIRELESS SPREADER HARNESS</p> <p>Provides vehicles with a receptacle for the 7-pin connector of a wireless spreader.</p> 
<p>RATCHET STRAP KIT</p> <p>Simplifies proper installation onto multiple vehicle types.</p> 	<p>CHAIN KIT</p> <p>Tie-down chain kit provides additional in-bed stability and security.</p> 	<p>CHUTE EXTENSION</p> <p>Chute extension adjusts spinner height to 22.5 and 27.5 inches below the material chamber.</p> 	<p>INVERTED V KIT</p> <p>Baffle that attaches within the tub to help maximize flow of compacted materials.</p> 	

	Utility & Wireless					PRO SERIES™ Spreaders		BULK PRO™ Spreaders		DROP PRO™ Spreaders		Stainless DROP PRO™ Spreaders	
	SP-100-1	SP-125-1	SP-225-1	SP-325	SR-210	SP-575X-1	SP-1075X-1	SP-1575-1	SP-1875-1	SD-600-1	SD-1400	DPS-250	DPS-600
Wireless Vehicle Harness				X	X								
Side Extension												X	X
Receiver Kit												X	
ArctiMaxx™ Grease	X	X	X	X	X	X	X	X	X	X	X	X	X
Control Cup Holder Mount						X	X	X	X	X		X	X
Spreader Control Adaptor Plate						X	X	X	X	X		X	X
30 Gallon Pre-Wet Tank									X				
Material Control Tube								X	X				

ACCESSORY MATRIX-HOPPER SPREADERS

	V-Pro™			HELIXX™ Poly Hopper				HELIXX Stainless Steel Hopper						
	32200	32300	32600	11780	11790	11800	11810	12145	12140	11900	11910	11920	11930	11940
Pre-Wet Tank Kit	X	X	X	X	X				X	X	X	X	X	X
100 gal Expansion Tank Kit						X	X					X	X	X
Work Light Kit				X	X	X	X	X	X	X	X	X	X	X
Strobe Light Kit				X	X	X	X	X	X	X	X	X	X	X
Vehicle-Side Harness Kit				X	X	X	X		X	X	X	X	X	X
Hopper Side Extension Kit				X	X	X	X			X	X	X	X	X
Truck Mount Kit										X	X	X	X	X
Ratchet Strap Kit				X	X	X	X	X	X	X	X	X	X	X
Chain Kit				X	X	X	X			X	X	X	X	X
Spreader Control Adaptor Plate for Cup Holder Mount	X	X	X	X	X	X	X	X	X	X	X	X	X	X
UTV Spreader Control Cover								X						
License Plate Kit								X						
Complete Truck Mount Kit								X						
Optimum Flow Kit	X	X	X											
Auger Tube Restrictor Kit	X	X	X											
Vibrator Kit				X	X	X	X	X	X					
Extension Collars								X	X					
Chute Extension Kit				X	X					X	X			
Inverted V Kit				X	X	X	X	X	X					
Steel Hopper Cover										X	X	X	X	X
Spill Guard Kit								X	X	X	X	X	X	X
Cup Holder Control Mount	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Tarp Kit								X	X					
Poly Lid Kit										X	X	X	X	X
Material Control Tube	X	X	X											
Extension Wiring Harness	X	X	X											




SPECIFICATIONS



HELIXX™ Poly Hopper

	11780	11790	11800	11810
Empty Weight	412 lb (186.9 kg)	443 lb (200.9 kg)	694 lb (315.2 kg)	718 lb (325.7 kg)
Overall Length	106" (269.2 cm)	115" (292.1 cm)	133" (287.0 cm)	133" (287.0 cm)
Overall Height	52" (132.1 cm)	59" (149.9 cm)	76" (193.0 cm)	83.5" (212.1 cm)
Overall Width	49" (124.5 cm)	49" (124.5 cm)	67.25" (170.8 cm)	67.25" (170.8 cm)
Bed Length	Minimum 72" (182.9 cm)	Minimum 80" (203.2 cm)	Minimum 98" (248.9 cm)	Minimum 98" (248.9 cm)
Bed Width	49" (124.5 cm)	49" (124.5 cm)	67.25" (170.8 cm)	67.25" (170.8 cm)
Hopper Length	80.75" (205.1 cm)	89.75" (227.9 cm)	109" (276.9 cm)	109" (276.9 cm)
Hopper Width	49" (124.5 cm)	49" (124.5 cm)	67.25" (170.8 cm)	67.25" (170.8 cm)
Capacity*	1.5 cu yd (1.1 cu m)/ 3,120 lb (1,415.2 kg)	2.25 cu yd (1.7 cu m)/ 4,680 lb (2,122.8 kg)	3.5 cu yd (2.7 cu m)/ 7,280 lb (3,302.2 kg)	5.0 cu yd (3.8 cu m)/ 10,400 lb (4,717.4 kg)
Spreading Width	8'-40' (2.4-12.2 m)	8'-40' (2.4-12.2 m)	8'-40' (2.4-12.2 m)	8'-40' (2.4-12.2 m)
Mounting	Truck bed mounted with ratchet-strap assist			

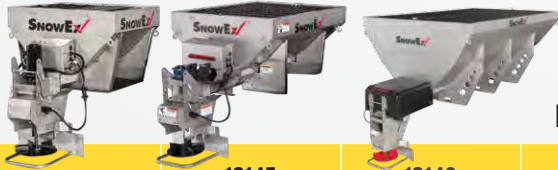

HELIXX Stainless Steel Hopper

	12145	12140	11900	11910	11920	11930	11940
Empty Weight	192 lb (87.1 kg)	337 lb (152.9 kg)	490 lb (222 kg)	509 lb (231 kg)	632 lb (287 kg)	740 lb (336 kg)	818 lb (371 kg)
Overall Length	52.75" (134 cm)	81" (205.74 cm)	115.5" (293 cm)	127.5" (324 cm)	139.5" (354 cm)	139.5" (354 cm)	151.5" (385 cm)
Overall Height	45.5" (115.6 cm)	45" (114.3 cm)	50.5" (128 cm)	50.5" (128 cm)	70" (178 cm)	74.25" (189 cm)	81.75" (208 cm)
Overall Width	38" (96.5 cm)	42.75" (108.6 cm)	50" (127 cm)	50" (127 cm)	50" (127 cm)	70" (178 cm)	70" (178 cm)
Min. Bed Length Required	28.5" (72.4 cm)	44" (111.8 cm)	62.5" (159 cm)	74.5" (189 cm)	91" (231 cm)	91" (231 cm)	102" (259 cm)
Hopper Length	30" (76.2 cm)	54.5" (138.4 cm)	84" (213 cm)	96" (244 cm)	108" (274 cm)	108" (274 cm)	119" (302 cm)
Hopper Height	25.75" (65.4 cm)	27.25" (69.2 cm)	33.5" (85 cm)	33.5" (85 cm)	41" (104 cm)	45.25" (115 cm)	52.75" (134 cm)
Hopper Width	38" (96.5 cm)	42.75" (108.6 cm)	50" (127 cm)	50" (127 cm)	50" (127 cm)	70" (178 cm)	70" (178 cm)
Capacity*	0.35 cu yd (0.27 cu m)/ 750 lb (340.2 kg)	0.7 cu yd (0.54 cu m)/ 1,500 lb (680.39 kg)	1.5 cu yd (1.1 cu m)/ 3,120 lb (1,415 kg)	2.0 cu yd (1.5 cu m)/ 4,160 lb (1,887 kg)	3.0 cu yd (2.3 cu m)/ 6,240 lb (2,830 kg)	4.5 cu yd (3.4 cu m)/ 9,360 lb (4,246 kg)	6.0 cu yd (4.6 cu m)/ 12,480 lb (5,661 kg)
Spreading Width	30' (9.14 m)	30' (9.14 m)	8'-40' (2.4 m-12.2 m)	8'-40' (2.4 m-12.2 m)	8'-40' (2.4 m-12.2 m)	8'-40' (2.4 m-12.2 m)	8'-40' (2.4 m-12.2 m)
Mounting	Truck bed mounted with ratchet-strap assist						



V-Pro™

	32200	32300	32600
Empty Weight	280 lb (127.0 kg)	386 lb (175.1 kg)	416 lb (188.7 kg)
Overall Length	64" (162.6 cm)	77" (195.6 cm)	77" (195.6 cm)
Overall Height	27" (68.6 cm)	27" (68.6 cm)	36" (91.4 cm)
Overall Width	48.5" (123.2 cm)	48.5" (123.2 cm)	48.5" (123.2 cm)
Bed Length	45" (114.3 cm)	58" (147.3 cm)	58" (147.3 cm)
Bed Width	34" (86.4 cm)	34" (86.4 cm)	44" (111.8 cm)
Hopper Length	53" (134.6 cm)	66" (167.6 cm)	66" (167.6 cm)
Hopper Width	48.5" (123.2 cm)	48.5" (123.2 cm)	48.5" (123.2 cm)
Capacity*	11 cu ft (0.311 cu m)/ 880 lb (399.2 kg)	0.5 cu yd (0.4 cu m)/ 1,080 lb (489.9 kg)	1.0 cu yd (0.8 cu m)/ 2,160 lb (979.8 kg)
Spreading Width	Up to 30' (9.1 m)	Up to 40' (12.2 m)	Up to 40' (12.2 m)
Mounting	Positive locking mount with bolt-down kit and ratchet-strap assist		



Drop Pro™

	SD-600-1	SD-1400
Empty Weight	175 lb (79.4 kg)	375 lb (170.1 kg)
Overall Length	24" (61.0 cm)	30" (76.2 cm)
Overall Height	28" (71.1 cm)	38" (96.5 cm)
Overall Width	49.5" (125.7 cm)	60" (152.4 cm)
Hopper Length	20.25" (51.4 cm)	24.25" (61.6 cm)
Hopper Width	48" (121.9 cm)	59.4" (150.8 cm)
Capacity*	6.0 cu ft (0.169 cu m)/ 480 lb (217.7 kg)	14.0 cu ft (0.396 cu m)/ 1,120 lb (508.0 kg)
Spreading Width	36" (91.4 cm)	48" (121.9 cm)
Mounting	Utility, receiver, or 3-point mount optional	Category 1, 3-point mount standard



Drop Pro

	DPS-250	DPS-600
Empty Weight	130 lb (58.9 kg)	160 lb (72.6 kg)
Overall Length	17" (43.2 cm)	20" (50.8 cm)
Overall Height	17.25" (43.8 cm)	28" (71.1 cm)
Overall Width	36.5" (92.7 cm)	36.5" (92.7 cm)
Hopper Length	12.8" (32.5 cm)	16.75" (42.54 cm)
Hopper Width	36.5" (92.7 cm)	36.5" (92.7 cm)
Capacity*	2.5 cu ft (0.76 cu m)/ 350 lb (158.8 kg)	6.0 cu ft (1.83 cu m)/ 650 lb (294.8 kg)
Spreading Width	30" to 36" (76.2 to 91.4 cm)	30" to 36" (76.2 to 91.4 cm)
Mounting	3-Point Mount, 2-Inch Receiver, or In-Bed Mount	

*Material weight equates to approximately 2,160 lb/cu yd or 80 lb/cu ft (1 bag of rock salt).
Please visit snowexproducts.com for the most current specifications.

SPECIFICATIONS



Utility & Wireless

	SP-100-1	SP-125-1	SP-225-1	SP-325	SR-210
Empty Weight	75 lb (34.0 kg)	65 lb (29.5 kg)	68 lb (30.8 kg)	79 lb (35.8 kg)	68 lb (30.8 kg)
Overall Length	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)	18" (45.7 cm)	22" (55.9 cm)
Overall Height	30" (76.2 cm)	30" (76.2 cm)	32" (81.3 cm)	33" (83.8 cm)	32" (81.3 cm)
Overall Width	30" (76.2 cm)	30" (76.2 cm)	30" (76.2 cm)	33" (83.8 cm)	30" (76.2 cm)
Hopper Length	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)	16.5" (41.9 cm)	22" (55.9 cm)
Hopper Width	30" (76.2 cm)	30" (76.2 cm)	30" (76.2 cm)	33" (83.8 cm)	30" (76.2 cm)
Capacity*	3.0 cu ft (0.085 cu m)/ 240 lb (108.9 kg)	3.0 cu ft (0.085 cu m)/ 240 lb (108.9 kg)	3.0 cu ft (0.085 cu m)/ 240 lb (108.9 kg)	3.25 cu ft (0.092 cu m)/ 260 lb (117.9 kg)	3.0 cu ft (0.085 cu m)/ 240 lb (108.9 kg)
Spreading Width	Up to 20' (6.1 m)	Up to 20' (6.1 m)	Up to 25' (7.6 m)	Up to 25' (7.6 m)	Up to 25' (7.6 m)
Mounting	2" light-duty hitch mount is standard				



Tailgate Pro

	SP-575X-1	SP-1075X-1
Empty Weight	106 lb (48.1 kg)	141 lb (63.9 kg)
Overall Length	20.5" (52.1 cm)	21" (53.3 cm)
Overall Height	35" (88.9 cm)	40" (101.6 cm)
Overall Width	38" (96.5 cm)	52" (132.1 cm)
Hopper Length	20.5" (52.1 cm)	21" (53.3 cm)
Hopper Width	38" (96.5 cm)	47.5" (120.7 cm)
Capacity*	5.75 cu ft (0.163 cu m)/ 460 lb (208.7 kg)	10.75 cu ft (0.304 cu m)/ 860 lb (390.1 kg)
Spreading Width	Up to 40' (12.2 m)	Up to 40' (12.2 m)
Mounting	Receiver mount standard (other mounts optional)	Mount not included (receiver, 3-point, or pivot mount optional)



Bulk Pro™

	SP-1575-1	SP-1875-1
Empty Weight	160 lb (72.6 kg)	180 lb (81.7 kg)
Overall Length	20.5" (52.1 cm)	24" (60.9 cm)
Overall Height	34" (86.4 cm)	36" (91.4 cm)
Overall Width	38" (96.5 cm)	52" (132.1 cm)
Hopper Length	20.5" (52.1 cm)	21" (53.3 cm)
Hopper Width	38" (96.5 cm)	47" (119.4 cm)
Capacity*	5.25 cu ft (0.149 cu m)/ 420 lb (190.5 kg)	9.0 cu ft (0.254 cu m)/ 720 lb (326.6 kg)
Spreading Width	Up to 30' (9.2 m)	Up to 40' (12.2 m)
Mounting	Receiver and 3-point mount combination standard	Mount not included (receiver, 3-point, or pivot mount optional)

*Material weight equates to approximately 2,160 lb/cu yd or 80 lb/cu ft (1 bag of rock salt).

Please visit snowexproducts.com for the most current specifications.



Precision Pro



Tow-Behind



V-Maxx™

	SP-1675	SP-1225G	SP-7000	SP-2400
Empty Weight	290 lb (131.5 kg)	190 lb (86.2 kg)	985 lb (446.8 kg)	326 lb (147.9 kg)
Overall Length	30" (76.2 cm)	30" (76.2 cm) excl. trailer tongue	128" (325.1 cm)	14" (35.6 cm)
Overall Height	30" (76.2 cm)	30" (76.2 cm)	60" (152.4 cm)	24" (60.9 cm)
Overall Width	49.5" (125.7 cm)	44" (111.8 cm)	64" (162.6 cm)	84" (213.4 cm)
Hopper Length	20" (50.8 cm)	N/A	78" (198.1 cm)	17" (43.2 cm)
Hopper Width	48" (121.9 cm)	N/A	49" (124.5 cm)	84" (213.4 cm)
Capacity*	6.0 cu ft (0.169 cu m)/ 480 lb (217.7 kg)	12.0 cu ft (0.339 cu m)/ 960 lb (435.5 kg)	1.5 cu yd (1.07 cu m)/ 3,240 lb (1,469.6 kg)	N/A
Spreading Width	4' to 12' (1.2 to 3.7 m)	Up to 40' @ 5 mph (12.2 m @ 8 km/h)	Up to 30' (9.2 m)	Up to 40' (12.2 m)
Mounting	Mount not included (receiver, 3-point, or utility mount optional)	Integral trailer	Integral trailer	Universal mounting kit to fit most dump bodies (some fabrication required)*



Walk-Behind

	SP-65	SP-85 / SP-85SS	SD-95 / SD-95SS
Empty Weight	25 lb (11.3 kg)	42 lb (19.1 kg)	55 lb (24.9 kg)
Overall Length	50" (127.0 cm)	52" (132.1 cm)	48" (121.9 cm)
Overall Height	28" (71.1 cm)	33" (83.8 cm)	36" (91.4 cm)
Overall Width	26" (66.0 cm)	29" (73.7 cm)	38.25" (97.2 cm)
Hopper Length	18" (45.7 cm)	20" (50.8 cm)	13" (33.0 cm)
Hopper Width	23" (58.4 cm)		30" (76.2 cm)
Capacity*	100 lb (45.4 kg)	160 lb (72.6 kg)	
Spreading Width	Up to 20' (6.1 m)	Up to 20' (6.1 m)	28" (71.1 cm)

Storage Containers



	74045	74047	74049	74051
Material Capacity	3 cu ft	6 cu ft	12 cu ft	18 cu ft
Empty Weight	19 lb (8.62 kg)	35.5 lb (16.10 kg)	50.5 lb (22.91 kg)	58 lb (26.31 kg)
Overall Length	33" (83.82 cm)	48" (121.92 cm)	48" (121.92 cm)	48" (121.92 cm)
Overall Width	22.75" (57.79 cm)	33.25" (84.46 cm)	33.25" (84.46 cm)	33.25" (84.46 cm)
Overall Height	17.4" (44.20 cm)	20.75" (52.71 cm)	27.75" (70.49 cm)	35.75" (90.81 cm)
Fork Pockets	No	Yes	Yes	Yes

SNOWEX[®]

MAKE YOUR MARK

SPREADERS / PLOWS / LIQUIDS / SIDEWALKS



TrynEx International holds a national cooperative contract through Sourcewell, formerly NJPA, a government agency that offers cooperative purchasing and other services to more than 50,000 government entities and nonprofit organizations such as municipalities, counties, DOT and educational institutions. Sourcewell Members can save both time and money purchasing from competitively solicited contracts. The awarded contract for TrynEx International includes pricing for its snow and ice handling equipment, supplies and accessories.

Specifications subject to change without notice. Images may not reflect dealer inventory and/or unit specifications.

TrynEx International, LLC, reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. TrynEx International, LLC, or the vehicle manufacturer may require or recommend optional equipment for sprayers. Do not exceed vehicle ratings with a sprayer. This product is manufactured under the following US patents: 6,953,163; 7,118,053; 7,347,390; 7,481,384; 7,540,436; 8,028,938; 9,033,265; 9,271,441; 9,296, 571; and other patents pending; CAN patents: 2,854,757; 2,900,491; and other patents pending. TrynEx International, LLC, offers a limited warranty for all sprayers and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: ArctiMaxx™, Bulk Pro™, HELIXX™, SnowEx®, Tow Pro™, V-Maxx™, V-Pro™.